


KS SERIES

SOCKET AND ACCESSORIES FOR RELAYS 繼電器座 10A 300V AC

CE RoHS



● KS-1102



● KS-1103



● KS-1104




● KS-1302



● KS-3103



● KS-1202



● KS-1203



● KS-1204




● KS-1302




● MT-0803



● KS-1102-304



● KS-1102-323

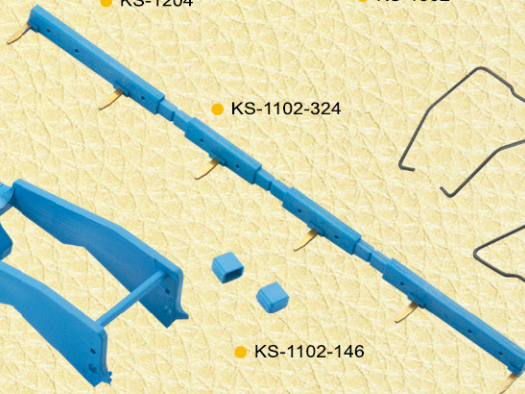


● KS-1102-146




● KS-1102-503

DIMENSIONS (mm)


Description	1102	1104	1202	1204	1302
Dielectric strength	≥ 2kV				
Protection class	IP20				
Tightening torque for screw	0.5 Nm				
Max. wire size (mm ²) for solid wire	1x6 / 2x2.5		1x2.5 / 2x1.5		
Max. wire size (mm ²) for stranded wire	1x4 / 2x2.5		1x2.5 / 2x1.5		

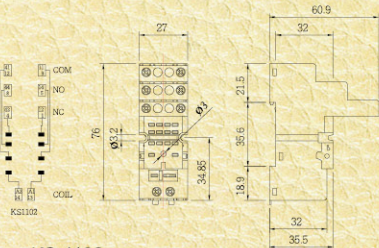


● KS-1102

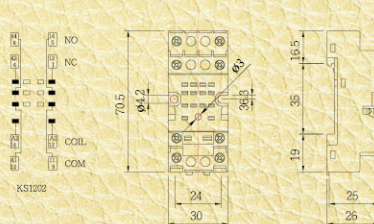


● KS-1202

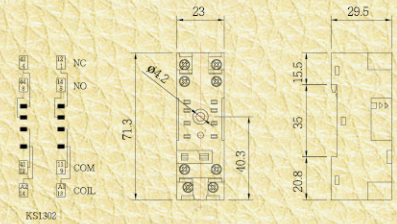

● KS-1302



● KS-1104



● KS-1204



● KS-1102-324